

All information is subject to change without notice. Please read bottom notes.


RoHS compatible

- FEATURES :**
- (1) 12.1 XGA color display with High Luminance
 - (2) Built in Long Life Lamps(MTTF:50,000h)
(Condition/ T_a :25 °C, I_{FL} :6.0mA(rms)(continuing lighting, f_{FL} :40KHz)
 - (3) Replaceable structure of lamp unit and Mounting compatible with LTD121C3*S(12.1 SVGA) Series
 - (4) Reverse scan function

TENTATIVE

Specification

Display size	12.1type(31cm)
Number of Pixels	1024(W) X 768(H) (XGA)
Display Mode	TFT-LCD (Transmissive type, Normally-White)
Pixel Pitch (mm)	0.24(W) X 0.24(H)
Luminance (typ.)	350 cd/m ² at I_{FL} =6.0mA(rms)
Response Time (typ.)	T_{ON} = 10ms, T_{OFF} = 30ms
Contrast (typ.)	400
Viewing Angle (CR≥10)	Vertical : 100degree, Horizontal : 120degree
I/F Format & Supply voltage	LVDS RGB 6bit, H/V sync+DE, V_{DD} =3.3V
Operating Temperature	0 to 50 degree C
Outline dimension (mm)	278.3(W) X 209.0(H) X 12.0max.(D)mm
Weight (approximately)	660g
Backlight	Sidelight (2 CCFLs)
Power Consumption	7.7W (Except the efficiency of FL inverter)

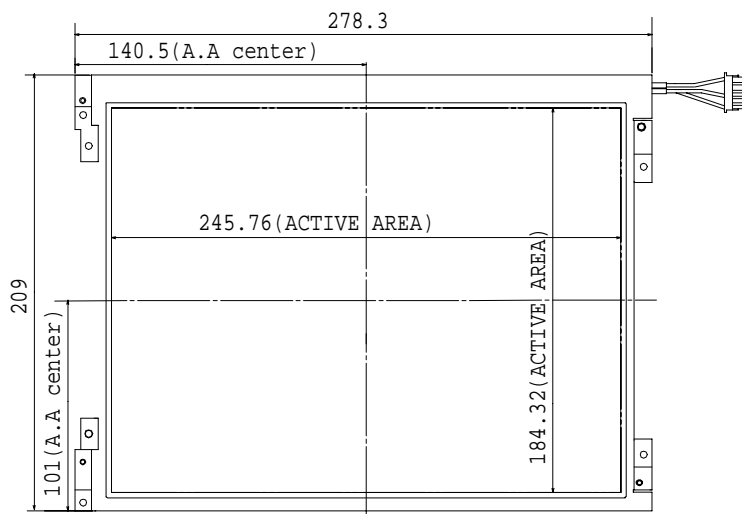

Rev.0.2R (2006/09/25)

*The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Toshiba Matsushita Display Technology or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Toshiba Matsushita Display Technology or others.

*The information contained herein may be changed without prior notice. It is therefore advisable to contact Toshiba Matsushita Display Technology before proceeding with the design of equipment incorporating this product.